



Installation and Operation Instruction

(Shower room)

M-630

M-630 Shower room



Installation and Operation Instruction

Packing list (FIGURE 1):

:

No	Name	Quantity	No	Name	Quantity
1	Aluminum by wall	2	9	Plastic hose	6
2	Fixed glass border	2	10	4*30self-tapping screw	14
3	4*12Round self-tapping screw	6	11	Seal strip	2
4	Screw block	6	12	Side waterproof plastic strip	2
5	Fixed glass	2	13	Plastic magnetic stripe	2
6	Slide	2	14	Pulley	4
7	Fixed glass stator	4	15	Handle	1
8	Adjustable glass	1			

Requisite Tools:

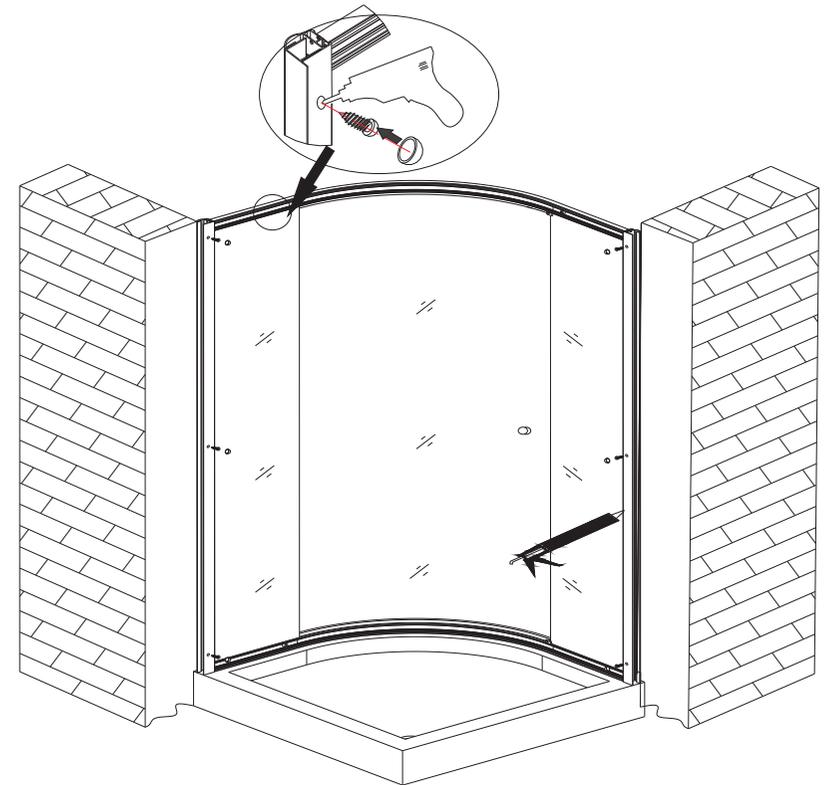
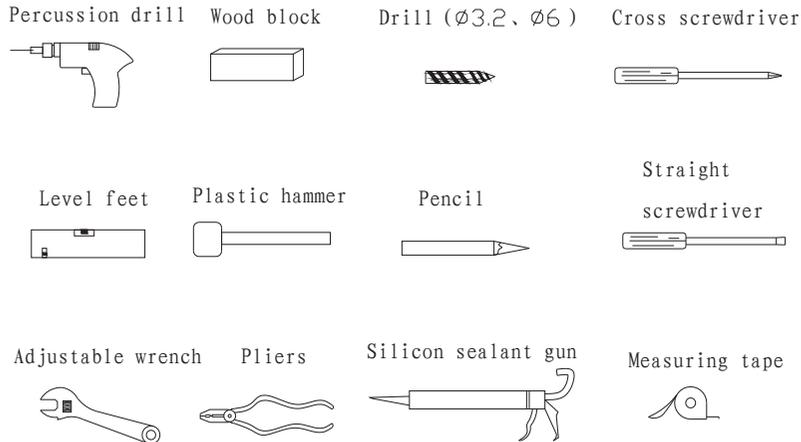


Maintenance Methods and Notes

- 1, Use soft,dry cloth when cleaning the walls and chassis of shower room. For trivial dirt, use soft cloth or sponge with neutral detergent to clean. Please do not use Nylon products to clean, or it will lose the luster of shower room , and create dirt.
- 2, For the dense dirt, please use alcohol to remove them. When using the bathroom-exclusive detergent, please make sure to use it at a proper way and note on their container. Improper usage will have a negative impact on the human body, and create some adverse conditions on the products.
- 3, When using the Mildew, please operate it by Mildew Manual instructions. After finished, clean it with water and dry it with cloth.
- 4,If waterproof filler loses,it will lead to leakage. Therefore,once lost, be sure to re-filled.
- 5,When cleaning ,please do ot use the following items, cause they would have a negative impact on the human body, and will result in some adverse conditions on products. Those items included:acidic and alkaline solvent, drugs(such as hydrochloric acid),thinner and other solvents acetone, decontamination powder, polishing detergent, nylon broom,sand paper, and etc.
- 6,In daily usage, add some lubricant to the pulley,ensure for easy-usage and better-maintenance.

3. Following figure 7 to install the pulley, hang the top pulley into the glide groove, and then bottom pulley, set them into the glass hole, lock the nut.
4. Adjusting the pulley from top to bottom so that it will appropriately elastic slide smoothly, and the magnetic strips will closely absorbed (figure 8)
5. Drill through the fixed glass border and wall aluminum with 3.2 drill, tighten them with 4*12 round self-tapping screws, and then cover the plastic cap (Figure 9)
6. Finally to use the silicon sealant gun to fill the cracks among shower body tray and wall.

General assembly drawing:

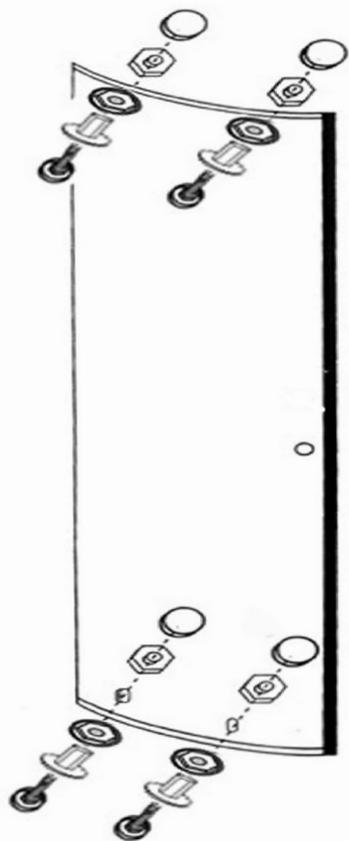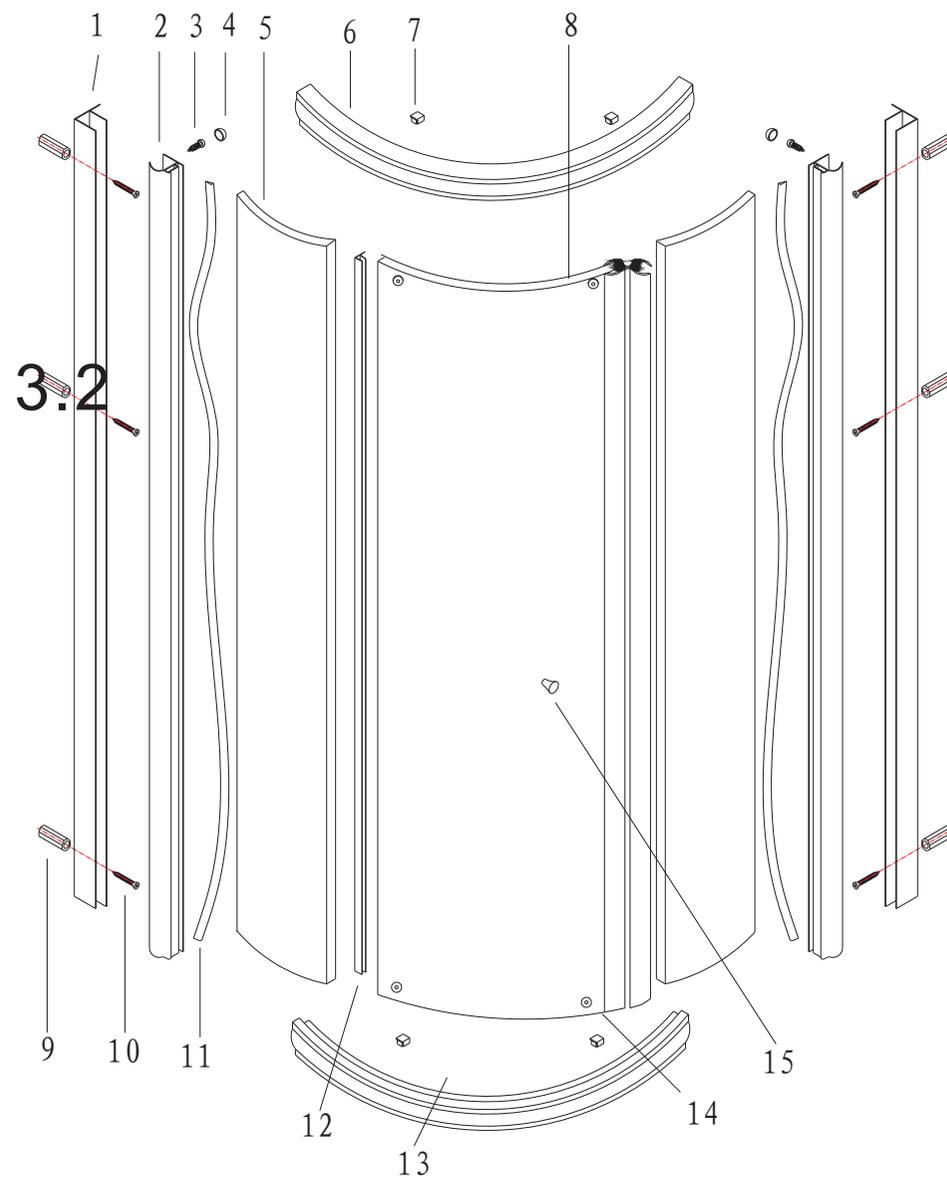

Installation of shower tray (first step):

1. installation of shower tray: Firstly to make water level in the bathroom in advance, and the shower tray water level need to be consistent with it (Figure 2)

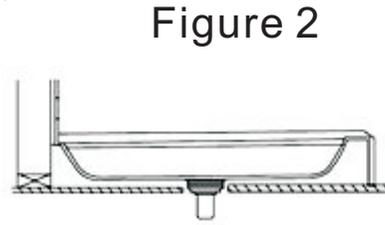


Figure 2

2. if the bathroom water level is fixed ,it can not be adjusted to be consistent with shower tray water level, you can revise it when connecting the hose . (Figure 3)

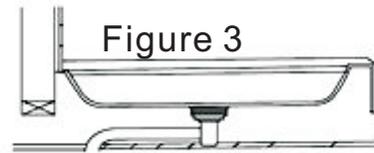


Figure 3

3. Adjusting the bottom kickstand of shower tray to lower the outlet a little bit (Figure 4)

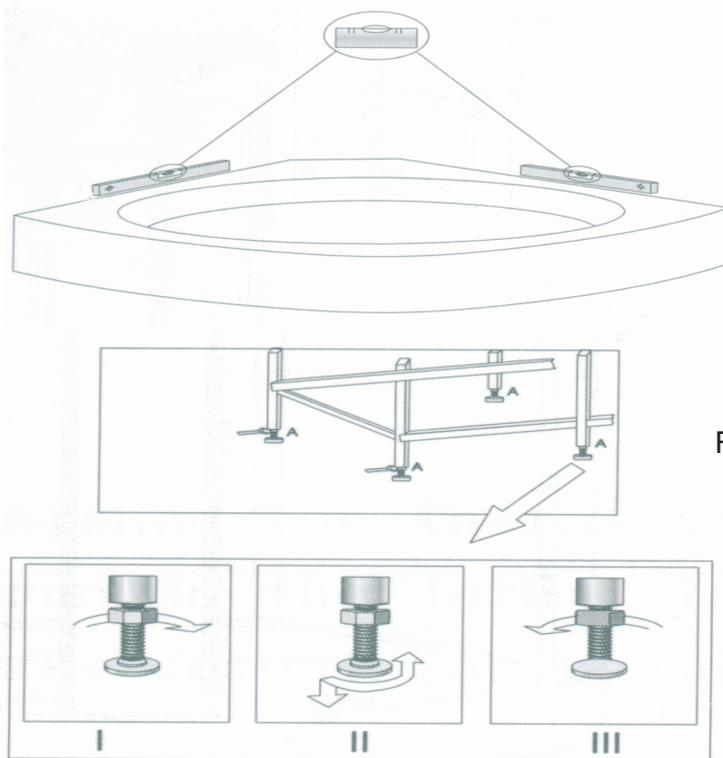


Figure 4

Installation of shower body: :

1. To lock the slide and border with 4*30 screws(D2) (step A) place the assembled door on the chassis or stone, and make it balance with level feet, then mark the position on wall aluminum with a pencil. Next drill holes on wall with the percussion drill, knock the plastic colloid into the hole with plastic hammer, then tight up the two pieces of wall aluminum with 4 * 30 screws. (Figure 6) to insert the frame into the wall aluminum .

2. To use the fixed glass stator to tight up the top and bottom glides into the inside groove of the border, aim the drilled holes on slides with 4 * 20 screws and lock the fixed glass stator (D1). Use the seal strips to fill the cracks(GAD Figure 13) (Step C)

Figure 5

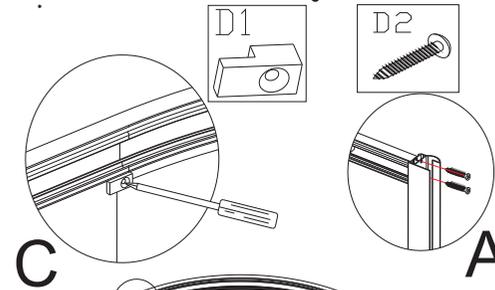


Figure 6

